

SuperFOIL

SFBA BB



24

ID: SFBABB-BD-CPR-22-05-24
EN 13984:2013

3 IN 1 DESIGN

INSULATION, VENTING
MEMBRANE & RADIANT BARRIER

SECONDARY RAIN BARRIER

'W1' FOR WATERTIGHTNESS

EASY TO INSTALL

NO SPECIALIST TOOLS
REQUIRED

REFLECTIVE PROPERTIES

REFLECTIVE SURFACE IMPROVES
THERMAL PERFORMANCE

IDEAL FOR USE IN

NEW BUILD, RETROFIT,
TIMBER-FRAME, DIY



✓ Wall

Change the way **you insulate**

Insulating Reflective Venting Membrane for use in Walls.

KEY FEATURES

- ✓ SuperFOIL SFBA BB from our Bubble foil range offers a 3 in 1 design, providing high-performance insulation, a reflective venting membrane and a radiant barrier all in 1 product
- ✓ SFBA BB's venting membrane allows moisture to escape, while significantly reducing the risk of condensation.
- ✓ SFBA BB rated as 'W1' for watertightness ensures a secondary rain barrier.
- ✓ When installed next to an airspace, such as cavity, SuperFOIL's reflective features provide excellent thermal insulation properties.
- ✓ Perfect for insulating timber frame walls.
- ✓ Requires no specialist tools and results in minimal wastage.



CUT TO
SIZE



STAPLE TO
SURFACE



SEAL WITH
TAPE



Building
Regulations
Compliance




Energy
Saving
Product

Company Info (UK)

Boulder Developments Ltd,
Boulder Business Park,
Pioneer Way, Lincoln,
LN6 0QR, England.

Company Info (EU)

Boulder Developments Ltd,
1st, 2nd and 3rd Floor,
Joop Geesinkweg 901 999,
Amsterdam, 1114 AB, Netherlands

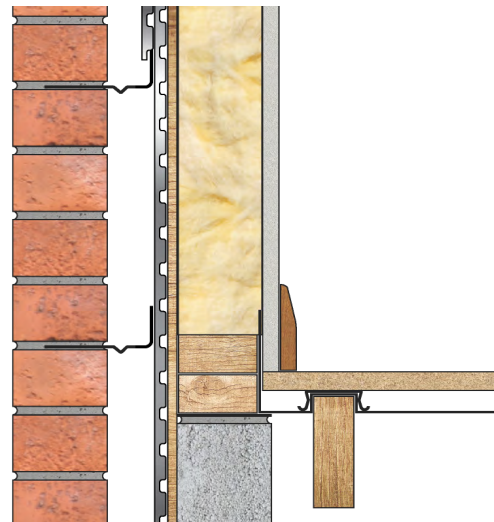

PRODUCT DIMENSIONS

Thickness	4mm
Length (Various)	50m
Width (Various)	1.35m
Weight (Various)	7.1kg

THERMAL PERFORMANCE

Core	0.125 R Value
Roof (inc. air spaces)	N/A
Wall (inc. air spaces)	0.79 R Value
Floor (inc. air spaces)	N/A
Emittance	0.05

FIRE PERFORMANCE

Reaction to Fire (Euroclass)	Class F
------------------------------	---------

Sizes / Figures are approximate & Subject to change without notice, tolerance